




LED VOLUMETRIC FIXTURE | **FUNDAMENTAL**

**EVERLINE**<sup>®</sup>

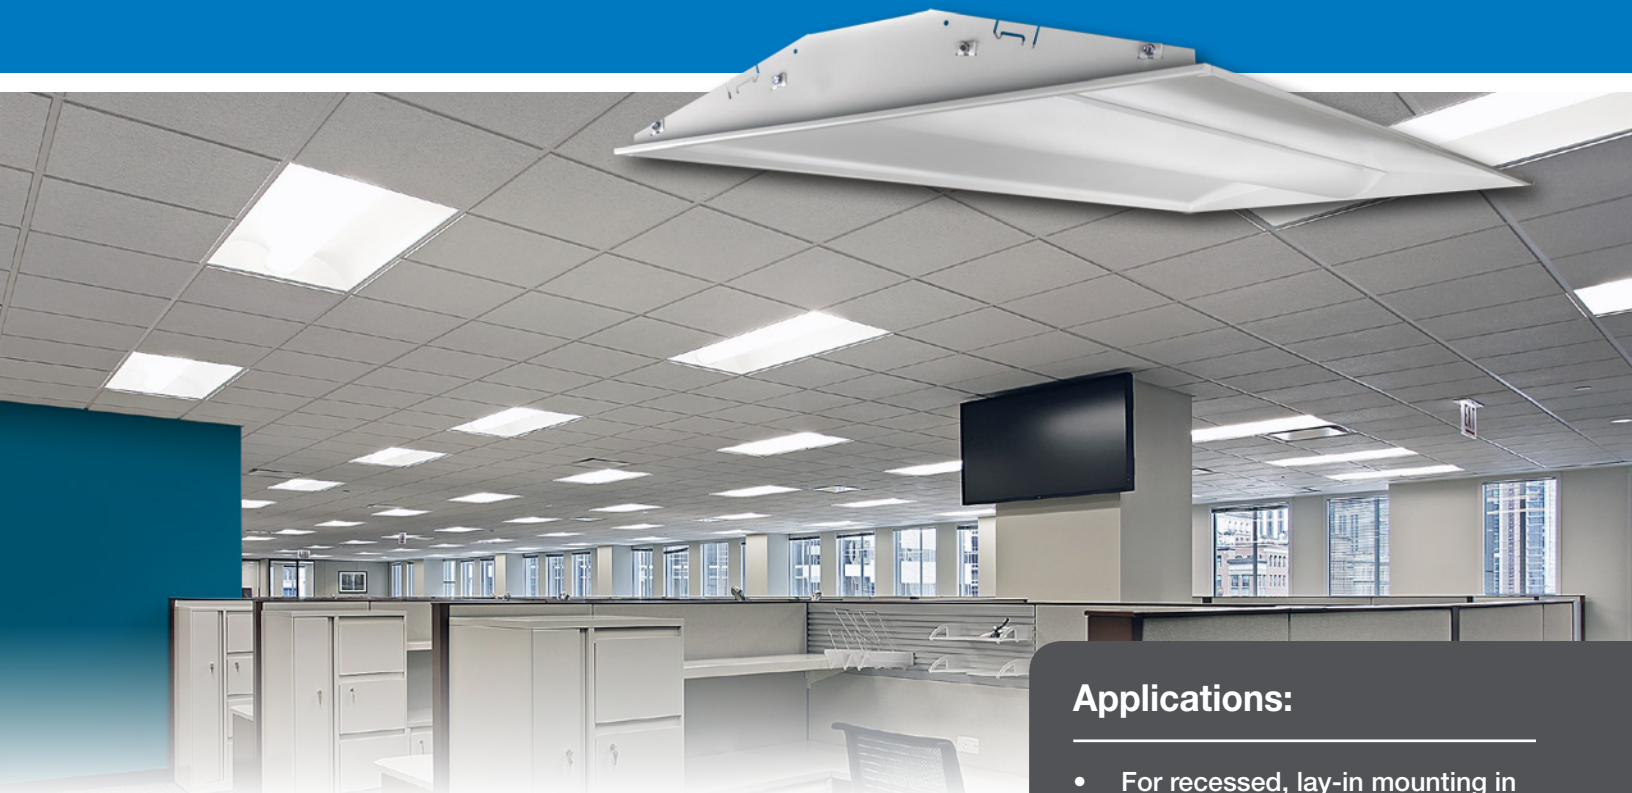

## Design Appeal

### Industry-Leading Reliability

Universal's VLA family of LED Volumetric Luminaires provides the visual comfort of diffuse lighting and excellent uniformity along with a modern design appeal.

### Features & Benefits:

- 2'x2', 2'x4', 1'x4' Options
- Energy Efficient:
  - Up to 50% more efficient than fluorescent technology
  - 0-10V Dimming standard
- Easy Maintenance & Installation:
  - Lumen maintenance exceeds L70 at 60,000 hours
  - Removable access plate makes power wires easy to get to from above the fixture
  - Grid clips and auxiliary suspension points provided at each corner
- Corrosion and scratch resistant
- Potential for rebates
- No Mercury. Save on costly lamp recycling and/or hazardous waste disposal.
- Visual Comfort
  - Update environments by getting rid of the "cave effect" exhibited by deep bodied parabolic and other aging fixture designs
  - Low loss acrylic center-basket diffuser
  - Volumetric fixtures provide better uniformity

### Applications:

- For recessed, lay-in mounting in T-Grid ceilings
- Indoor, non-condensing, non-corrosive environments
- 120-277V
- Ideal for: Commercial, Retail, Hospitality & Office



For a list of DesignLights Consortium<sup>®</sup> QPL listed products please visit [www.designlights.org/qpl/en/saved/UBU24XJ](http://www.designlights.org/qpl/en/saved/UBU24XJ)




**5 YEAR WARRANTY**

## Industry-Leading Reliability

For 70 years, Universal has been on the cutting edge of high efficiency lighting design, pushing the industry towards increasingly higher standards of energy efficiency for LED systems, lighting ballasts, and control systems.

## “Matched Systems”

Universal makes it easy to upgrade to LED technology with our complete in-house design (electronic, thermal and optical) including EVERLINE® “matched” modules and drivers.



## Controllability

Fluorescent systems require specific sockets and wiring treatments when controlled by dimming or frequent switching by occupancy sensors or other control devices. Universal's EVERLINE® fixtures are equipped with 0-10V dimming LED drivers, require no special "lamp wiring" for controllability and are not susceptible to short lamp-life effects when controlled by frequent switching.

PACKAGED DIMENSIONS (in)				
Format	L	W	H	lb
1x4 ft	49.0	12.5	4.5	13.0
2x2 ft	25.0	25.0	4.5	11.0
2x4 ft	49.0	24.5	4.5	19.0

Nominal Dimensions

PRODUCT ENVELOPE (in)			
Format	L	W	H
1x4 ft	48	12.0	3.5
2x2 ft	24	24.0	3.5
2x4 ft	48	24.0	3.5

Nominal Dimensions

## Options:

- 6 Ft, 3 Wire whip
- 6 Ft Cord set
- Future wireless connectivity
- 10 watt Battery Pack option delivers approximately 1200 lumens for 90 minutes.

## Consistent Illumination:

- Color Temperatures (CCTs) of 3000K, 3500K, 4000K and 5000K
- Not vulnerable to color and intensity aberrations associated with routine lamp maintenance of fluorescent systems.

## Performance:

Fixture	Watts	Lumens	LPW
1'x4'	48	6025	125
2'x2'	24	3018	125
	35	4160	119
2'x4'	32	4307	134
	48	6155	128
	57	7212	122

## Product Ordering Information:

Ordering Information	Series	Format	Watts	W	CRI	Color Temp.	Voltage	Options
VLA = Recessed, Lay In Volumetric Luminaire for 15/16 inch Ceiling Grids	14 = 1ft x 4ft	-	48 <sup>1</sup>	W	8 = 80 (minimum)	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K (Nominal)	U = 120-277 VAC 50/60 Hz	EM = Backup battery pack WP = 6 FT, 3 Wire, whip C6F <sup>5</sup> = 6 FT cord set
	22 = 2ft x 2ft	-	24 <sup>2</sup> 35 <sup>2</sup>					
	24 = 2ft x 4ft	-	32 <sup>3</sup> 48 <sup>1</sup> 57 <sup>3</sup>					

### ORDERING NOTES:

1. 1x4 ft & 2x4 ft only
2. 2x2 ft & 2x4 ft only
3. 2x2 ft only
4. For use on 120VAC systems only



It's **EASY**  
to **REACH US...**

**UNIVERSAL LIGHTING TECHNOLOGIES, INC.**  
51 Century Blvd., Suite 230  
Nashville, TN 37214-3683

GENERAL INFO: (615) 316-5100

For Technical Engineering Services (TES), application support and warranty information, call **1-800-225-5278**

WEBSITE: [unvlt.com](http://unvlt.com)  
EMAIL: [webmaster@unvlt.com](mailto:webmaster@unvlt.com)

LIT#: VLF031920